


# Dual band high-performance in-wall Gigabit wireless access point

## QUICK OVERVIEW

AIR-WAP602-AX1 is a dual-band high-performance in-wall gigabit wireless access point device based on the 802.11ax standard launched by AIRPRO, it could offer maximum 1775Mbps access rate. AIR-WAP602-AX1 works in the 2.4GHz and 5GHz frequency bands and supports advanced wireless technologies such as MU-MIMO, OFDMA, spatial multiplexing, and TWT. The first radio of AIR-WAP602-AX1 works in the 2.4GHz frequency band and can provide a maximum access rate of 575Mbps; the second radio works in the 5GHz frequency band and can provide a maximum access rate of up to 1200Mbps.

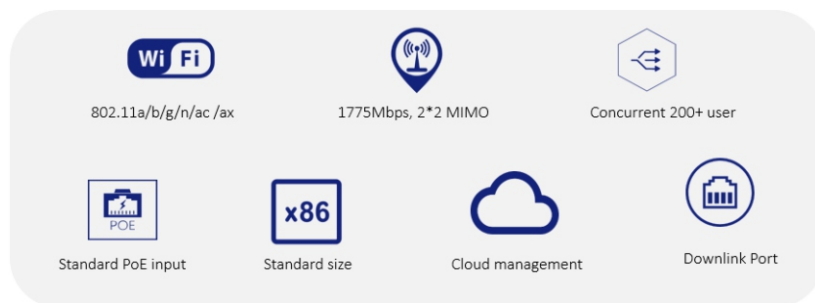

## FEATURES

### 802.11ax Wi-Fi 6 wireless in-wall access point:

AIR-WAP602-AX1 supports the 802.11ax standard, operates in both 2.4 GHz and 5 GHz band, and provides an access bandwidth up to 1775 Mbps. This model is a high-end in-wall access point for hotel, education, government and business networks.

### Wired and wireless gigabit access:

AIR-WAP602-AX1 integrated gigabit wired uplink port, can truly meet the bandwidth requirement of wireless clients.

### Easy to deploy x86 standard panel:

AIR-WAP602-AX1 panel supports 86 box standards, and can perfectly fit plug-in installed to any standard panel, With the use of the PoE cable, the whole installation will be low cost, no noise, short period (the time to install an AP is less than 3 minutes).

### Downlink Port:

AIR-WAP602-AX1 provides one gigabit downlink port for the accessing of wired devices, which improves the flexibility of networking deployment.

### Good PoE compatibility:

AIR-WAP602-AX1 can work well with all PoE switch (cisco, HUAWEI, juniper, AirPro etc.) which support 802.3at standard, this allows to power up AIR-WAP602-AX1 directly, power adapter is not required anymore.

### Dual-mode fit & fat:

AIR-WAP602-AX1 can work in fit or fat mode and can flexibly switch between the fit mode and the fat mode according to network planning requirements.



## TECHNICAL SPECIFICATIONS

HARDWARE FEATURES		
Security	Encryption 802.11i Portal authentication WAPI MAC address authentication LDAP authentication PEAP authentication WIDS/WIPS Protection against DoS attacks Forwarding security  User isolation  Periodic SSID enabling and disabling Access control of free resources Wireless SAVI ACL  Secure access control of APs  802.11W	64/128 WEP, TKIP, and CCMP encryption Yes Yes Yes Yes Yes Yes Yes Anti-DoS for wireless management packets Frame filtering, white list, static blacklist, and dynamic blacklist AP L2 forwarding suppression Isolation between client Yes Yes Yes Access control of various data packets such as MAC, IPv4, and IPv6 packets Secure access control of APs, such as MAC authentication, password authentication, or digital certificate authentication between an AP and an AC Yes, encryption of management frames
Forwarding	IP address setting  IPv6 forwarding IPv6 portal Local forwarding Multicast Roaming AP switching reference  WMM	Static IP address configuration or dynamic DHCP address allocation Yes Yes Yes IGMP snooping Yes Signal strength, bit error rate, RSSI, S/N, whether neighboring APs are normally operating, etc. Yes
QoS	Priority mapping  QoS policy mapping  L2-L4 packet filtering and flow classification Load balancing  Bandwidth limit  Call admission control (CAC) Power saving mode Automatic emergency mechanism of APs Intelligent identification of terminals Multicast enhancement	Ethernet port 802.1P identification and marking Mapping from wireless priorities to wired priorities Mapping of different SSIDs/VLANs to different QoS policies Mapping of data streams that match with different packet fields to different QoS policies Yes: MAC, IPv4, and IPv6 packets Load balancing based on the number of users Load balancing based on user traffic Load balancing based on frequency bands Bandwidth limit based on APs Bandwidth limit based on SSIDs Bandwidth limit based on terminals Bandwidth limit based on specific data streams CAC based on the number of users Yes Yes Yes Multicast to unicast

<p>Management</p>	<p>Network management</p> <p>Maintenance mode</p> <p>Log function</p> <p>Alarm</p> <p>Fault detection</p> <p>Statistics</p> <p>Switching between the fat and fit modes</p> <p>Remote probe analysis</p> <p>Watchdog</p>	<p>Centralized management through an AC; both fit and fat modes</p> <p>Both local and remote maintenance</p> <p>Local logs, Syslog, and log file export</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>An AP working in fit mode can switch to the fat mode through a wireless AC;</p> <p>An AP working in fat mode can switch to the fit mode through a local control port or Telnet.</p> <p>Yes</p> <p>Yes</p>
<p>Value added service</p>	<p>Value added marketing</p> <p>Value added authentication</p> <p>Passenger flow analysis</p>	<p>Support: various apps based on intelligent terminals, advertising push based on location, personalized push of portals</p> <p>WeChat, SMS, QR code</p> <p>Yes</p>

AIR-WAP605-AX1



Dormitory room

- 802.11a/b/g/n/ac /ax
- High performance, 1775Mbps
- 802.3 at PoE
- X86 standard, easy installation
- Multiple gigabit downlink port

**ORDER INFORMATION**

Product	Description
<p>AIR-WAP602-AX1</p>	<p>AIRPRO Indoor Wi-Fi 6 AP, 802.11a/b/g/n/ac/ax supported (2.4GHz:2*2, 5GHz 2*2), max 1775Mbps access rate, fat &amp; fit, 802.3 at, managed by AIRPRO hardware controller &amp; cloud platform.</p>



[www.airpro.in](http://www.airpro.in)