

AP 1208F

8-Port 100Mbps+1 Dual Personality Giga Port Switch with 8-Port PoE AP-1208F

- With 8 PoE ports, transfers data and power on one single cable
- 1*1000M Dual Personality (RJ45+SFP) Uplink port
- Working with IEEE 802.3af/at compliant PDs, expands SMB and office network
- Power Supply: 144W



OVERVIEW

AP-1208F, 8FE+1SFP+1GE PoE Switch is right for remote 100M wireless cabling and HD monitoring network. Besides with access of high performance, it provides 8 10/100M Base-T Ethernet ports and 1 Dual Personality 1000Base-X Gigabit SFP and Ethernet port. Ports 1~8 support IEEE 802.3af/at PoE (15.4W/30W) standard; supply electricity and transmit data at the same time to AP, IP Camera or IP Phone via CAT5/CAT6 twisted-pair cables. In addition to these, it provides stronger safety protection system. this switch is useful for campus, school, college, hospital, hotel, Wide are networks etc.

KEY FEATURES

- With 8 PoE ports, transfers data and power on one single cable
- 1*1000M Dual Personality(RJ45+SFP)Uplink port
- Working with IEEE 802.3af/at compliant PDs, expands SMB and office network
- Power Supply: 144W

TECHNICAL SPECIFICATIONS

Model No. AP-1208F

Hardware	
Data interface	8 10/100Mbps RJ45 Ports 1*10/100/1000Mbps Dual Personality AUTO Negotiation/AUTO MDI/MDIX
Network Media	10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 100BASE-TX: UTP category 5, 5e cable (maximum 100m) 1000BASE-TX: UTP category 5e,6 cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m)
PoE Ports (RJ45)	Standard: 802.3af/at compliant PoE Ports: Port1- Port8 Power Supply:144W
Back Plan Bandwidth	3.6Gbps
Power Supply	100-240VAC, 50/60Hz
Dimensions (L x W x H)	230mm*170mm*44mm

Software	
Transfer Method	Store and Forward
MAC Address Table	8K
Advanced Functions	Compatible With IEEE 802.3af/at Compliant PDs Priority Function Mac Address Auto-Learning And Auto-Aging IEEE802.3x Flow Control For Full-Duplex Mode And Backpressure For Half-Duplex Mode


Others	
Environment	Operating Temperature: 0°C~60°C (32°F~140°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Package	8-Port 100Mbps+ 1-Combo Port Switch with 8-Port PoE 48V/3A Power Adapter User Guide
System Requirements	Microsoft® Windows 8,Windows 7,98SE, NT, 2000, Vista™, MAC® OS, N48VetWare®, UNIX® or Linux.





8-Port 100Mbps+1 Dual Personality Giga Port Switch with 8-Port PoE AP-1208F

8-Port 100Mbps+1 Dual Personality Giga Port Switch with 8-Port PoE AP-1208F

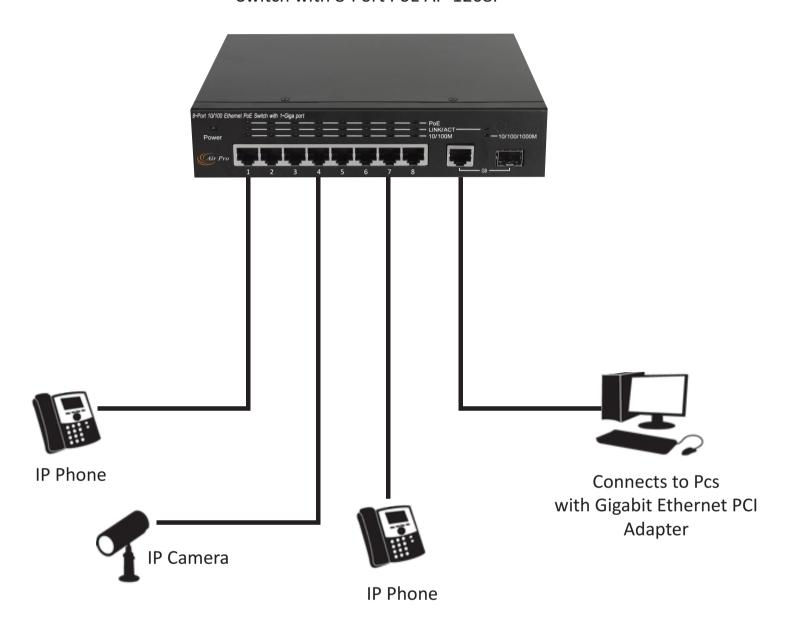



www.airpro.in