



## 5-Port Gigabit Desktop Switch with 4 Port PoE GS1905

- 5 Port 10/100/1000Mbps Desktop Switch with 4 Port PoE
- Working with IEEE 802.3af/at compliant Pds, expands home and office network
- Power Supply : 72W
- Steel housing, desktop or wall-mounting design



AirPro Technology Ltd.

5-Port Gigabit Desktop Switch with 4-Port PoE GS1905

## OVERVIEW

Gs1905 is a 5 10/100/1000Mbps ports unmanaged switch that requires no configuration and provides 4 PoE (Power over Ethernet) ports. It can automatically detect and supply power with all IEEE 802.3af/at compliant Powered Devices (PDs). In this situation, the electrical power is transmitted along with data in one single cable allowing you to expand your network to where there are no power lines or outlets, where you wish to fix devices such as APs, IP Cameras or IP Phones, etc.

## **KEY FEATURES**

- 5 Port 10/100/1000Mbps Desktop Switch with 4 Port PoE
- Working with IEEE 802.3af/at compliant Pds, expands home and office network
- Power Supply : 72W
- Steel housing, desktop or wall-mounting design



TECHNICAL S	PECIFICATIONS
-------------	---------------

TECHNICAL SPECIFICATIONS	
Hardware	
Data interface	5Ports 10/100/1000Mbps RJ45 Ports AUTO Negotiation/AUTO MDI/MDIX
Network Media	10BASE-T: UTP category 3, 4, 5 cable (ma 100BASE-TX: UTP category 5, 5e cable (m 1000BASE-T: UTP category 5, 5e, 6 or abo EIA/TIA-568 100Ω STP (maximum 100m)
PoE Ports (RJ45)	Standard: 802.3 af/802.3 at compliant PoE in Ports: Port 1 - Port 4 Power Supply : 72W
Back Plan Bandwidth	10Gbps
Power Supply Output	DC 48V/1.5A
Fan Quantity	Fanless
Dimensions (L x W x H)	151mm x 126mm x 36mm

Software	
Transfer Method	Store and Forward
MAC Address Table	8K
Advanced Functions	Compatible With IEEE 802.3af/802.3 at Co Priority Function Mac Address Auto-Learning And Auto-Agi IEEE802.3x Flow Control For Full-Duplex N

Others	
Certification	FCC, CE
Environment	Operating Temperature: 0°C~40°C (32°F Storage Temperature: -40°C~70°C (-40°F Operating Humidity: 10%~90% non-cond Storage Humidity: 5%~90% non-condensi
Package	5-Port Gigabit Desktop Switch Power Adapter
System Requirements	Microsoft® Windows 8, Windows 7,98SE, NT, 2000, XP, Vista™, MAC® OS, NetWare®, UNIX® or Linux.



## 5-Port Gigabit Desktop Switch with 4-Port PoE GS1905

aximum 100m) maximum 100m) oove cable (maximum 100m)


Compliant Pds

;ing Mode And Backpressure For Half-Duplex Mode

F~104°F) F~158°F) densing sing



5-Port Gigabit Desktop Switch with 4-Port PoE GS1905

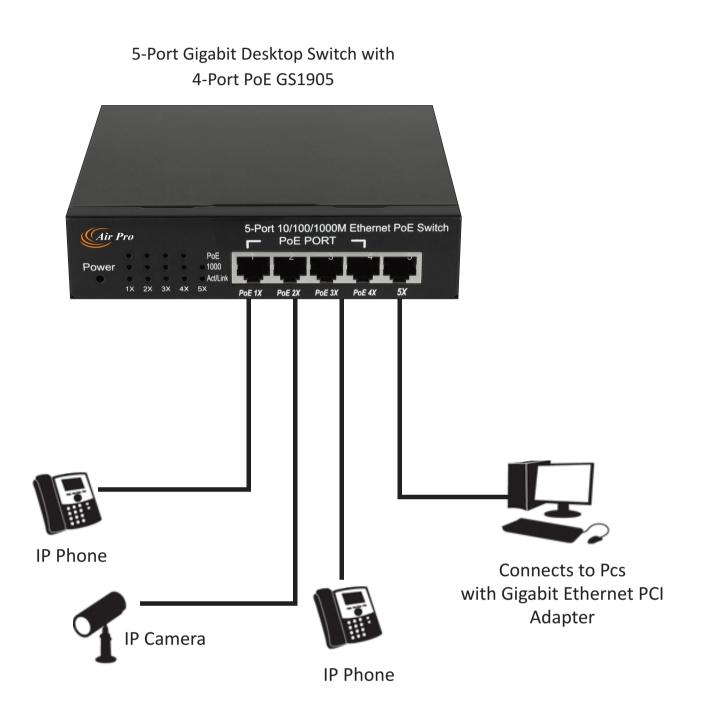



in this desumant are subject to shange without notice. AirDre products are cold with a limited warranty descri

All specifications in this document are subject to change without notice. AirPro products are sold with a limited warranty described at: www.airpro.in Copyright 2016, AirPro. All rights reserved.