

# 4G LTE

## 4G LTE Wireless-N VPN Broadband Router

- Dual-WAN ports 4G LTE and Gigabit Ethernet WAN (EWAN) for broadband connectivity
- 4G LTE embedded with a built-in SIM card slot
- Gigabit WAN and LAN
- Fibre (FTTC/FTTP/FTTH) ready with high WAN throughput
- Embedded IPSec, PPTP, L2TP, GRE and OpenVPN secure VPN connection with powerful encryption
- IPv6 ready (IPv4/IPv6 dual stack)
- 3G/ 4G LTE Usage Allowance
- SMS Control
- USB port for storage/NAS: SAMBA server, FTP server
- QoS for traffic prioritization
- Multiple wireless SSIDs with wireless guest access
- Supports IPTV applications
- Ideal for SOHO, office, and home users



DATASHEET

#### **OVERVIEW**

This router is a compact and advanced broadband router that offers flexible and multiple Internet connection options, embedded 4G LTE and Gigabit EWAN interfaces, for home, SOHO, and office users to enjoy high-speed, high-level security Internet connection via cellular wireless and/or Ethernet WAN. With an integrated 802.11n wireless access point and 4-port Gigabit Ethernet LAN, this router enables faster wireless speed of up to 300Mbps and LAN connection 10 times faster than regular 10/100Mbps Ethernet LAN.

### **4G LTE MOBILITY**

With 4G LTE-based Internet connection (4G LTE embedded module, requires an additional SIM card), you can access to the Internet through 4G LTE whether you are seated at your desk or taking a cross-country trip. LTE status page visually displays its current 4G LTE signal status and more.

## WIRELESS MOBILITY AND SECURITY

With an integrated 802.11n Wireless Access Point, this router delivers up to 3 times the wireless coverage of a 802.11b/g network device, so that wireless access is available everywhere in the house or office. If your network requires wider coverage, the built-in Wireless Distribution System (WDS) allows you to expand your wireless network without additional wires or cables. Multiple SSIDs allow users to access different networks through a single access point. Network managers can assign different policies and functions for each SSID, increasing the flexibility and efficiency of the network infrastructure.

### **SECURE VPN CONNECTIONS**

The supports comprehensive and robust IPSec VPN (Virtual Private Network) protocols for business users to establish private encrypted tunnels over the public Internet to secure data transmission between headquarters and branch offices. It also supports VPN dial in from smart phones for secure remote Internet connection via your home broadband. With a built-in DES/3DES VPN accelerator, the router enhances IPSec VPN performance significantly.

## IPV6 READY - PATHWAY TO THE FUTURE

Internet Protocol version 6 (IPv6) is a version of the Internet Protocol that is designed to succeed IPv4. IPv6 has a vastly larger address space than IPv4. The router is already supporting IPv6, you can use it in IPv6 environment no need to change device. The dual-stack protocol implementation in an operating system is a fundamental IPv4-to-IPv6 transition technology. It implements IPv4 and IPv6 protocol stacks either independently or in a hybrid form. The hybrid form is commonly implemented in modern operating systems supporting IPv6. \*1

## PRODUCT SPECIFICATIONS

#### **High Speed Mobile Wireless Communication**

- Embedded 4G LTE module
- · High performance external antenna

#### **Embedded 4G LTE**

- Supported frequency bands:\*1
- LTE FDD: B1(2100MHz), B3(1800MHz),
- B5(850MHz), B7(2600MHz),
- B8(900MHz), B20(800MHz),
- LTE TDD: B38(2600MHz), B40(2300MHz),
- B41(2500MHz)
- Peak Downlink/Uplink Rate\*\*1
- LTE FDD: 150Mbps/50Mbps
- LTE TDD: 130Mbps/35Mbps
- (Depends on carrier network support)

#### **Network Protocols and Features**

- Dual WAN Failover/ Failback
- IPv4. IPv6. IPv4/IPv6 dual stack\*2
- NAT, Static Routing and RIP v1/v2
- Virtual Server and DMZ
- SNTP. DNS proxy
- · Universal Plug and Play (UPnP) compliant
- Dynamic Domain Name System (DDNS)
- 3G/ 4G LTE Usage Allowance
- SMS Control

#### **Firewall**

- Built-in NAT Firewall
- Stateful Packet Inspection (SPI)
- · Prevents DoS attacks including Land Attack, Ping of Death, etc.
- Access Control
- IP Filtering, MAC Filtering, URL Filtering
- · Password protection for system management
- · VPN pass-through

#### **Quality of Service Control**

· Traffic prioritization management based on

#### Virtual Private Network

- IPSec
- PPTP
- · L2TP
- GRF OpenVPN

#### **Wireless LAN**

- · Compliant with IEEE 802.11n, 802.11g and 802.11b standards
- · 2.4GHz 2.484GHz frequency range
- Up to 300Mbps wireless operation rate
- 64/128 bits WEP supported for encryption
- · WPS (Wi-Fi Protected Setup) for easy setup Wireless security with WPA-PSK/WPA2-PSK
- · Multiple wireless SSIDs with wireless guest access
- · Wireless client isolation
- · Supports WDS repeater function

#### **USB Applications Server**

· Storage/NAS: FTP server, SAMBA server

#### **IPTV Applications\*3**

- · IGMP Proxy and IGMP Snooping
- MLD Proxy and MLD Snooping
- · Quality of Service (QoS)

#### Management

- · Quick installation wizard
- Web-based GUI for remote and local management
- · Web-based GUI multi user access level
- · Firmware upgrades and configuration data upload and download via Web-based GUI
- Supports DHCP server/client/relay (WAN port)
- TR-069\*2 (CWMP) supports remote management
- · Supports SNMP

#### **Hardware Specifications**

#### PHYSICAL INTERFACE

- 4G LTE wireless: 2x detachable high performance antennas
- EWAN: RJ-45 Gigabit Ethernet port for connecting to ADSL/Cable/VDSL/Fibre modem device
- · Wireless LAN: 2x internal PIFA antennas
- Ethernet LAN: 4-port 10/100/1000Mbps auto-crossover (MDI/ MDI-X) switch
- USB: 1x USB 2.0 host type A
- · SIM slot (for the SIM card from Telco/ISP)
- · Factory default reset button
- · Wireless on/off and WPS push button
- Power jack for DC input
- Power switch

## **Physical Specifications**

Dimensions: 9.04" x 6.10" x 1.69" (229.5 mm x 155 mm x 43mm)

#### **Power Requirements**

Input: 15V DC, 1.6A


#### **Operating Environment**

- Operating temperature: 0°C ~ 40 °C
- Storage temperature: -20°C ~ 70 °C
- · Humidity: 20% 95% non-condensing





## **Connection Diagram**

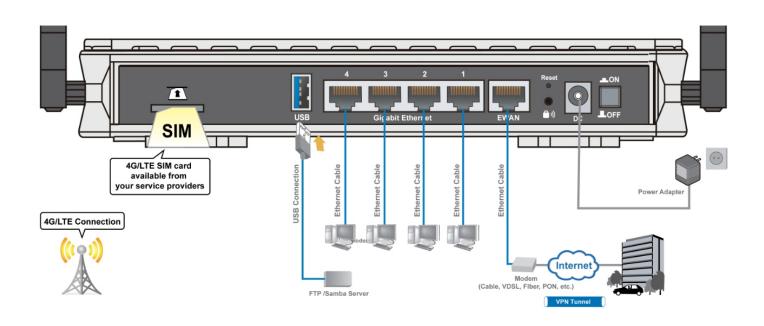



www.airpro.in